



MODEL

DISK


CLASSIFICATION

CEILING SURFACE

PHOTO

| Reference | Power | [D] diameter | [I] Installation |
|-----------|-------|--------------|------------------|
| SC60060 | 60W | Ø600mm | Surface mounted |

SIZE DIAGRAM

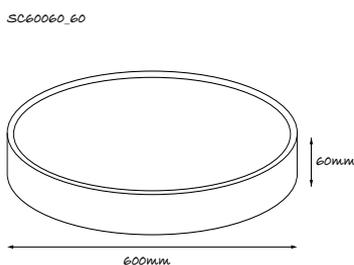

DESCRIPTION

DISK 60W LED surface ceiling light. While you might be fond of this sleek look, you may not know all of the factors that contribute to creating perfect lighting in your home or business, because of simplicity and beautiful design of DISK series. DISK series are a great option for different areas as hotels, restaurants, museums, meeting rooms, hospitals, cafe, retail. Surface lights blend in with the ceiling, so they will not use as much space as traditional hanging light fixtures. Lights can be spaced evenly throughout a room.

APPLICATION

Series for offices, museums, commercial areas, schools, retails shops, restaurants...

FEATURES

Built in isolated Driver double isolation, Khun, Lifud, Eaglerise other options available
Dimmable 0-10V, Triac, Dali as an option
Input Voltage/ Voltaje AC220-240 50/60Hz, multivoltage available
Fixture modules is fixed, lock and no tiltable.

Front aluminum lamp bezel.

FINISH

Color Black, white, silver, green, pink and yellow trim, other colours under demand are available.

ELECTRONICS

Big chip: 3pcs 14x31mil chip per LED Sanan 2835SMD with high phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 80 with 2-step MacAdam Ellipse binning. High CRI is 97 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers is available.

CONSTRUCTION

Housing constructed of cold rolled steel and powdercoated to resist corrosion. Trim fabricated from steel and finished to specification.

CODE COMPLIANCE

CE and RoHS certified to meet EU and other countries standards.

Life time >30,000 hours (Ta 25° C)

CONTENT TABLE product main technical data

| Reference | Lumens | Driver [1] | CCT [2] | Beam | Finishes [3] | CRI | Options [4] | Weight |
|-------------|---------|-----------------|---------------------|------|---|----------|----------------|--------|
| SC60060 60W | ~5200lm | Built in driver | 2700K, 3000K, 4000K | 170° | black, white, grey, green, pink, yellow | CRI > 80 | check notes(*) | 0.19Kg |

(*)Notes

- [1] Driver: Kuhn, Lifud, Osram, eaglerise Dimming: DALI, 1-10V, Triac as an option
- [2] CCT: 2700K, 3000K, 4000K, other CCT also available. CRI/ CRI > 80 as standard CRI 90 and CRI 97 as an option
- [3] Finishes: Black, white and grey, other finishes as an option
- [4] Options: UGR<19 as an option
- [5] Photometric curves: any requirement contact us

DISK SERIES

Nelux architectural lighting reserves the right to make changes in dimensions and technical features of our products. Nelux continually works to improve our products without prior notice.



tel: +852 28600042
whatsapp +852 5342 5197
follow us @nelux_hk

